

Features

- 120A switching capability
- Single coil and double coils are available
- External accessories such as manganese copper shunts and transformers can be ordered according to customer requirement
- Breakdown voltage (between contact and coil):4KV
- Meet standard of IEC62052-31: 2005 UC4
- Environment-friendly product(RoHS compliant)
- Outline Dimensions: (115×46.5×26)mm
- Can be integrated design, convenient automatic installation and production
- Power frequency interference resistance, and good consistency
- Main application: smart meter



CHARACTERISTICS

Specifications	Item		
Contact Data	Contact arrangement		3A、3B
	Contact resistance(initial)		≤1.0mΩ(6VDC 1A)
	Contact material		AgSnO ₂
Rated value	Rated load(Resistance load)		120A 276VAC
	Max.switching voltage		276VAC
	Max.switching current		120A
	Max.switching capacity		33120VA
Electrical performance	Insulation resistance(initial)		1000MΩ(500VDC)
	Dielectric strength (Initial)	Between open contacts	2000VAC 1min
		Between coil&contacts	4000VAC 1min
	Closing time		≤30ms
	Opening time		≤30ms
Mechanical performance	Shock resistance	Functional	98m/s ² (10g)
		Destructive	980m/s ² (100g)
	Vibration resistance		10Hz~55Hz 1.5mm DA
Endurance	Mechanical		1×10 ⁵ ops
	Electrical	ON/OFF=1S/9S	120A 276VAC 2×10 ⁴ ops(COS φ=1)
	Electrical UC3 ⁽¹⁾	ON/OFF=10S/20S	100A 250VAC 5000ops(COS φ=1) 5000ops次(COS φ=0.5)
Operate condition	Ambient temperature		-40℃~85℃
	Humidity		5%~85%RH
Termination			Plug-in needle type+Screw type(XB)
Unit weight			Approx.270g (Without attachment)
Construction			Flux proofed

Note: (1) Electrical endurance meet IEC62055-31 test requirements,do the inductive load test after the resistive load test.

■ COIL DATA(23℃)

■ Single coil latching

Nominal Voltage	Closing Voltage VDC	Opening Voltage VDC	Rated Current (±10%)	Coil Resistance (±10%)	Nominal Power	Max Voltage
DC 6V	≤4.50	≤4.50	0.83A	7.2Ω	5W	DC 9V
DC 9V	≤6.75	≤6.75	0.56A	16.2Ω		DC 13.5V
DC 12V	≤9.00	≤9.00	0.42A	28.8Ω		DC 18V
DC 24V	≤18.00	≤18.00	0.21A	115.2Ω		DC 36V

■ Double coils latching

Nominal Voltage	Closing Voltage VDC	Opening Voltage VDC	Rated Current (±10%)	Coil Resistance (±10%)	Nominal Power	Max Voltage
DC 6V	≤4.50	≤4.50	1.67/1.67A	3.6/3.6Ω	10W	DC 9V
DC 9V	≤6.75	≤6.75	1.1/1.1A	8.1/8.1Ω		DC 13.5V
DC 12V	≤9.00	≤9.00	0.83/0.83A	14.4/14.4Ω		DC 18V
DC 24V	≤18.00	≤18.00	0.42/0.42A	57.6/57.6Ω		DC 36V

■ ORDERING INFORMATION

FH26L 3B 1 T -L1 R -XXX -DC6V


- ① Type
- ② Contact arrangement: 3A=3 open contacts
3B=3 close contacts
- ③ PCB mounting: 1=Standard,
7=Customized Accessories
- ④ Contact material: T=AgSnO₂
- ⑤ Coil type: L1=Single coil latching, L2=Double coils latching
- ⑥ Polarity: Nil=standard polarity R=reversed polarity
- ⑦ Customer special code: numbers or letters denote customer's requirements
- ⑧ Coil specification: DC6/9/12/24V




WIRING DIAGRAM AND PC BOARD LAYOUT(Unit:mm)

Standard polarity wiring diagram


Three sets of contacts synchronized at the load terminal

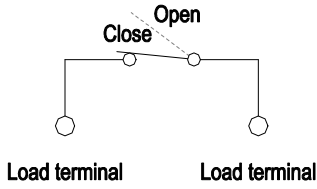


Single Coil





Double Coils

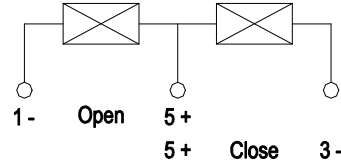

Auxiliary switch contacts
(Available in 6, 7 or 8, 9)
Contact closure/open at the load terminal

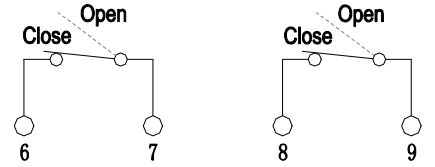

Standard shape drawing

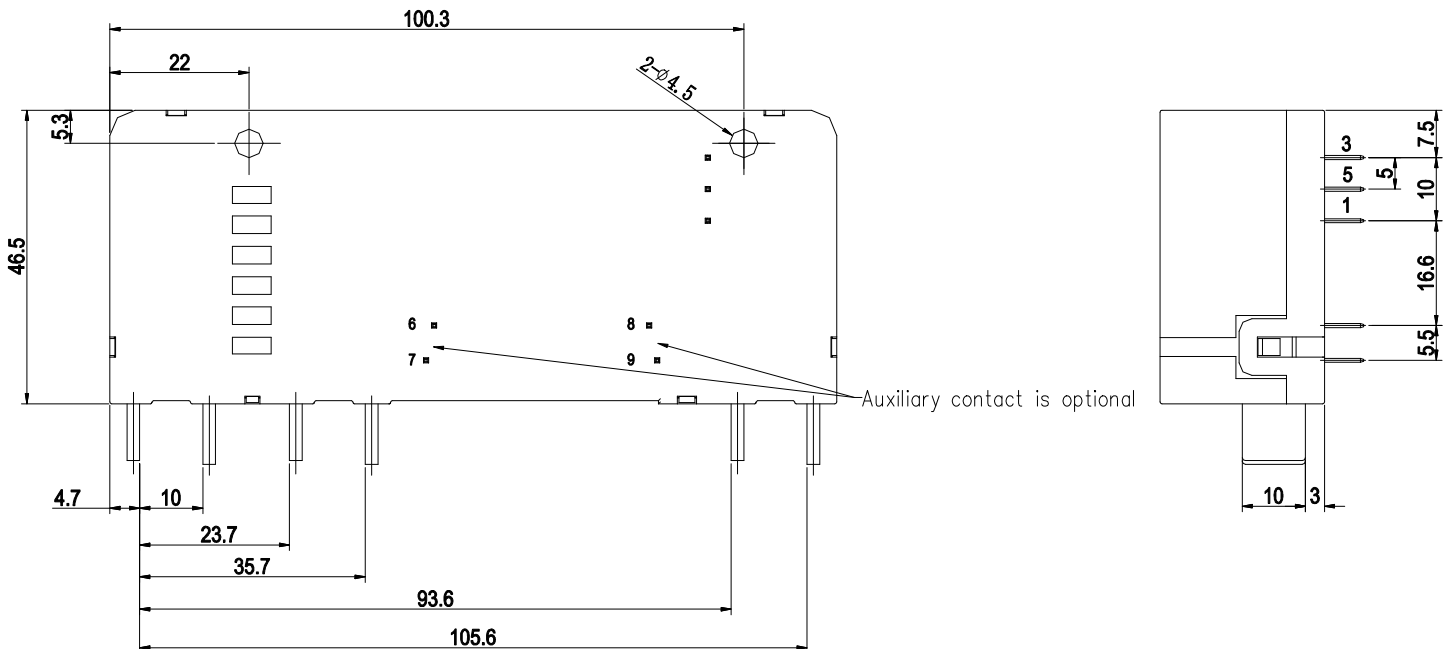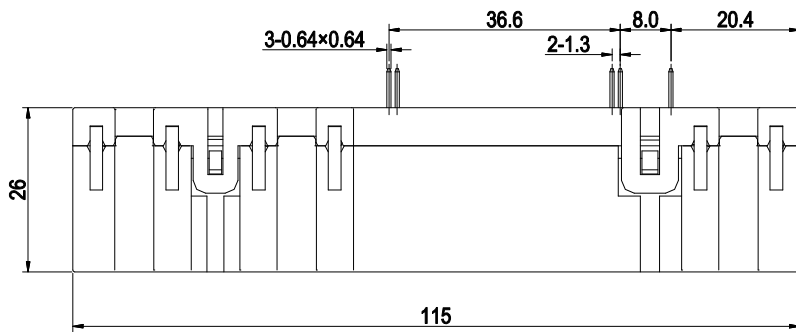

Remark: (1) In case of no tolerance shown in outline dimension:outline dimension \leq 1mm,tolerance should be \pm 0.2mm;outline dimension $>$ 1mm and $<$ 5mm,tolerance should be \pm 0.3mm;outline dimension \geq 5mm,tolerance should be \pm 0.5mm.

(2) The tolerance without indicating for PCB layout is always \pm 0.1mm.



■ NOTICE

- ① For the state of latching relay as delivered,if the customer has no special requirements, we default to the closed state before delivery,but due to transportation or relay installation by shock and other factors may change the state,so please reset it to the closed or open state as needed when using;
- ② In order to maintain the initial performance parameters of the relay, please be careful not to drop the product or be affected by external force;
- ③ In order to maintain "opening" or "closing" status,energized voltage applied across the coil should reach the rated voltage,it is recommended that the actual driving voltage be 1~1.5 times the rated voltage, Pulse width $\geq 100\text{ms}$,and do not energize to "opening" coil and "closing" coil simultaneously,long energized time(more than 1 min) should also be avoided;
- ④ Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress;
- ⑤ Latching relays are customized products,the above cases are only for reference. If you have any questions, please contact Fanhar for more technical support;
- ⑥ The specification is for referenc e only.Specifications subject to change without notice.

